

G-SERIES
EXCAVATORS



JOHN DEERE

210G / 210G LC



MIDSIZED
MIGHT



RELIABLE



PRODUCTIVE



***SEE WHAT YOU
CAN DO NOW***



W.



COVER ALL THE ANGLES.

Whether you use them to excavate footings, load trucks, set stone, place pipe, or whatever, you'll get more done with a 210G or 210G LC. Customer-inspired improvements include Powerwise Plus™ technology to boost performance on demand. Pattern-control switch that eases operation — now standard. Updated cab comforts. Plus options such as hydraulic single-pedal propel system, deluxe LED lighting, and debris-deflecting track-frame undercover. These are just some of the ways these accomplished excavators have you covered.

YOUR BEST IDEAS

NOW THERE'S EVEN MORE TO LIKE.

We're upgraded our popular 210G/210G LC Excavators to include pretty great input from customers just like you. Read on to find out how we put your ideas to work.

Keep it clean

Optional adjustable rotary precleaner pulls clean air into the system — a must in harsh jobsite conditions.

Control pattern

Pattern-control switch is now a standard feature instead of a field-kit option.

Waste not

Auto-idle speed can be lowered to a more fuel-efficient 800 rpm.

Performance plus

Powerwise Plus technology delivers fuel-efficient power when you need it.

Going forward

Hydraulic single-pedal propel system enables straight-line machine tracking without articulating both hand and foot pedals.



**SET AUTO-IDLE
TO 800 RPM TO
CONSERVE
FUEL**





CONTROL WITHOUT COMPROMISE

UNEARTH MORE PERFORMANCE.

With impressive arm force, bucket breakout force, and lift capacity, the 210G and 210G LC are productive performers. And their no-compromise Powerwise Plus hydraulic-management system yields the pinpoint metering and smooth-as-silk low-effort control that have become trademarks of John Deere excavators.



Get in the flow

Additional hydraulic capability a necessity? Two factory-installed high-pressure, high-flow auxiliary packages meet the need.

Reliable precision

For work that requires extra finesse, short-throw low-effort controls, unmatched metering, and smooth multifunction operation deliver dependable precision.

Intuitive technology

John Deere Powerwise Plus technology delivers on-demand power. Precise pump flow when the pilot controls are metered provides reliable, fuel-efficient performance.

Need a boost

When the digging gets tough, simply press the power-boost button on the right-hand control and muscle through.



PRESS
POWER
BOOST
FOR MORE MUSCLE



THE COMFORT ZONE

GET IN TOUCH WITH PRODUCTIVE OPERATION.

Refined LCD monitor employs a rotary control that makes it quick and easy to tap into an abundance of performance and convenience functions and features. Single-pedal propel keeps the machine moving straight forward. Operators will also appreciate the quiet and spacious cab, virtually unobstructed all-around visibility, and numerous other amenities that provide everything your operators need to do their best work.



3-WAY ADJUSTABLE
**PREMIUM
LEATHER SEAT**
(OPTIONAL)

Dial it up

Multi-language LCD monitor and rotary dial provide intuitive access to a wealth of information and functions. Just turn and tap to select work mode, access operating info, check maintenance intervals, source diagnostic codes, adjust cab temperature, and tune the radio. A USB port helps keep you digitally connected.

Take control

Ergonomically correct short-throw pilot levers provide smooth, predictable fingertip control with less movement or effort. Push buttons in the right lever allow predictable control of auxiliary hydraulic flow for operating attachments. Optional sliding switch provides proportional speed control, giving you full command at your fingertips.

Calm, cool, and collected

Automatic, high-velocity bi-level climate control system with automotive-style adjustable louvers helps keep the glass clear and the cab comfortable.

Pedal propel

Hydraulic single-pedal propel system moves the machine when and where you need it to without having to articulate both the hand and foot pedals.

We've got your back

Sculpted mechanical-suspension high-back seat with 12.5 in. of travel slides together or independent of the joystick console, so it won't cramp an operator's style. Opt for a premium air-suspension leather seat that adjusts three ways, is thermally heated and actively cooled, and includes a high-visibility orange seat belt.

Put some light on it

Optional deluxe LED lights at cab front and rear, boom, and toolbox illuminate when your workday extends beyond daylight. They use less power, output more light, last longer, and are easy to replace when needed.

RUGGED AND RELIABLE

NOTHING IS BUILT LIKE THESE DEERE.

Conditions can be tough on the jobsite. So we equipped the 210G/210G LC with some equally tough features. Industry-exclusive double-seal swing bearing that delivers rock-solid durability. Mainframe single-sheet undercover thickened for added strength. Options like a track-frame undercover to keep debris from accumulating and an adjustable rotary precleaner that pulls clean air into the system no matter how foul it is outside. When you know how they're built, you'll run these Deere.

Stress resistance

A John Deere exclusive, three welded bulkheads within the boom resist torsional stress. Booms, arms, and mainframes are so tough, they're warranted for three years or 10,000 hours.

Pattern of protection

Standard pattern-control switch and fuel shutoff are well protected yet conveniently accessible at ground level.

Get good grades

Optional grade-reference system includes sensor mounts to help speed installation, eliminating the need to grind, weld, and repaint. Our "open-architecture" design allows you to employ your favorite brand of grade-control system to help maximize productivity and uptime while lowering daily operating costs.

TK-Series bucket teeth

Standard TK-Series bucket teeth are engineered for maximum strength and impact absorption. Hammer-free installation and removal simplifies changes and minimizes downtime.

Cooler core cleanout

Highly efficient hydraulically driven fans run only as fast as needed, reducing noise, fuel consumption, and operating costs. Reversing option automatically back-blows cooler cores to keep them clean.

Designed for durability

Reinforced D-channel side frames with recessed doors provide maximum cab and component protection. Standard mainframe and optional track-frame undercovers provide an extra layer of defense.

FT4 engine technology

To meet stringent EPA Final Tier 4 (FT4)/EU Stage IV standards, we built on our Interim Tier 4 (IT4)/Stage IIIB solution to deliver the best combination of performance, efficiency, and reliability without sacrificing power or torque. Our field-proven technology is simple, fluid efficient, fully integrated, and fully supported. It employs field-proven cooled exhaust gas recirculation (EGR), easy-to-maintain high-uptime exhaust filters, and selective catalytic reduction (SCR).





JOHN DEERE

210G

LC

READY TO WORK

UNCOVER ALL THE WAYS WE KEEP COSTS DOWN.

DEF access

With a large and accessible tank, diesel exhaust fluid (DEF) can be conveniently filled when refueling. DEF overflow routes excess outside the machine to avoid paint damage.

Refill 'er up

Large fuel tanks and 500- and 5,000-hour engine and hydraulic oil-service intervals decrease downtime for routine maintenance. Fluid-level sight gauges are conveniently located and can be checked at a glance.

FT4 ash service

Ash-service intervals for the diesel particulate filter (DPF) are condition based, with the machine notifying the operator before service is required. Typically, ash service is not necessary until the first engine overhaul depending on machine application and maintenance practices. FT4 components are warranted for 10,000 hours.

Fuel savers

Auto-idle automatically reduces engine speed — now to as low as 800 rpm — when hydraulics aren't in use. Auto-shutdown further preserves precious fuel.

Easy filter maintenance

Vertical spin-on fuel and engine oil filters are positioned in the right rear compartment for simplified ground-level servicing.



Get valuable insight with
JOHN DEERE WORKSIGHT™

John Deere WorkSight is an exclusive suite of telematics solutions that increases uptime while lowering operating costs. At its heart, JDLink™ machine monitoring provides real-time utilization data and alerts to help you maximize productivity and efficiency while minimizing downtime. Remote diagnostics enable your dealer to read codes and record performance data without a trip to the jobsite.

Keep downtime down with
JOHN DEERE ULTIMATE UPTIME

John Deere Ultimate Uptime, featuring John Deere WorkSight, is a customizable support solution available exclusively from your Deere dealer. This flexible offering maximizes equipment availability with standard John Deere WorkSight capabilities that can help prevent future downtime and speed repairs when needed. In addition to the base John Deere WorkSight features, our dealers work with you to build an uptime package that meets the specific needs of your machine, fleet, project, and business, including customized maintenance and repair agreements, onsite parts availability, extended warranties, fluid sampling, response-time guarantees, and more.





210G LC SPECIFICATIONS

Engine	210G / 210G LC		
	Base engine for use in U.S., U.S. Territories, and Canada		
Manufacturer and Model	John Deere PowerTech™ PVS 6.8L 6068HT106		
Non-Road Emission Standard	EPA Final Tier 4/EU Stage IV		
Net Rated Power (ISO 9249)	119 kW (159 hp) at 2,000 rpm		
Cylinders	6		
Displacement	6.8L (415 cu. in.)		
Off-Level Capacity	70% (35 deg.)		
Aspiration	Turbocharged, air-to-air charge-air cooler		
Cooling			
	Cool-on-demand hydraulic-driven, suction-type fan with remote-mounted drive		
Powertrain			
	2-speed propel with automatic shift		
Maximum Travel Speed			
Low	3.5 km/h (2.2 mph)		
High	5.5 km/h (3.4 mph)		
Drawbar Pull (turtle mode)	20 700 kg (45,636 lb.)		
Hydraulics			
	Open center, load sensing		
Main Pumps	2 variable-displacement axial-piston pumps		
Maximum Rated Flow	212 L/m (56 gpm) x 2		
Pilot Pump	1 gear		
Maximum Rated Flow	30 L/m (7.9 gpm)		
Pressure Setting	4000 kPa (580 psi)		
System Operating Pressure			
Circuits			
Implement	34 300 kPa (4,975 psi)		
Travel	35 500 kPa (5,149 psi)		
Swing	33 300 kPa (4,830 psi)		
Power Boost	38 000 kPa (5,511 psi)		
Controls	Pilot levers, short stroke, low-effort hydraulic pilot controls with shutoff lever		
Cylinders			
	<i>Bore</i>	<i>Rod Diameter</i>	<i>Stroke</i>
Boom (2)	120 mm (4.7 in.)	85 mm (3.3 in.)	1260 mm (49.6 in.)
Arm (1)	135 mm (5.3 in.)	95 mm (3.7 in.)	1475 mm (58.1 in.)
Bucket (1)	115 mm (4.5 in.)	80 mm (3.1 in.)	1060 mm (41.7 in.)
Electrical			
Number of Batteries (12 volt)	2		
Battery Capacity	1,000 CCA		
Alternator Rating	100 amp		
Work Lights	2 halogen (1 mounted on left-hand side of boom, 1 on frame)		
Undercarriage	210G	210G LC	
Rollers (each side)			
Carrier	2	2	
Track	7	8	
Shoes, Triple Semi-Grousers (each side)	46	49	
Track			
Adjustment	Hydraulic	Hydraulic	
Guides	Center	Center	
Chain	Sealed and lubricated	Sealed and lubricated	
Ground Pressure			
Triple Semi-Grouser Shoes			
600 mm (24 in.)	48.8 kPa (7.08 psi)	44.4 kPa (6.44 psi)	
700 mm (28 in.)	42.5 kPa (6.16 psi)	39.3 kPa (5.71 psi)	
800 mm (32 in.)	37.7 kPa (5.47 psi)	34.4 kPa (4.99 psi)	

210G LC SPECIFICATIONS



Swing Mechanism 210G / 210G LC

Swing	
Speed	13.3 rpm
Torque	68 900 Nm (50,662 lb.-ft.)

Serviceability

Refill Capacities

Fuel Tank	403 L (106.5 gal.)
Cooling System	35.4 L (9.4 gal.)
Engine Oil with Filter	20.8 L (5.5 gal.)
Hydraulic Tank	135 L (35.7 gal.)
Hydraulic System	240 L (63.4 gal.)
Gearbox	
Swing	6.2 L (6.6 qt.)
Propel (each)	7.8 L (8.2 qt.)
Pump Drive	1 L (1.1 qt.)
Diesel Exhaust Fluid (DEF) Tank	26.6 L (7.0 gal.)

Operating Weights 210G 210G LC

With full fuel tank; 79-kg (175 lb.) operator; 1065-mm (42 in.), 0.91-m³ (1.19 cu. yd.), 886-kg (1,951 lb.) general-purpose bucket; 2.91-m (9 ft. 7 in.) arm; and 4250-kg (9,370 lb.) counterweight


With Triple Semi-Grouser Shoes		
800 mm (32 in.)	23 161 kg (51,061 lb.)	23 631 kg (52,097 lb.)
700 mm (28 in.)	22 862 kg (50,402 lb.)	23 318 kg (51,407 lb.)
600 mm (24 in.)	22 522 kg (49,653 lb.)	22 928 kg (50,548 lb.)

Component Weights

Undercarriage with Triple Semi-Grouser Shoes	Standard	LC
600 mm (24 in.)	6929 kg (15,262 lb.)	7335 kg (16,156 lb.)
700 mm (28 in.)	7269 kg (16,011 lb.)	7725 kg (17,015 lb.)
800 mm (32 in.)	7568 kg (16,670 lb.)	8038 kg (17,705 lb.)
1-Piece Boom (with arm cylinder)	1731 kg (3,813 lb.)	1731 kg (3,813 lb.)
Arm with Bucket Cylinder and Linkage		
2.42 m (7 ft. 3 in.)	935 kg (2,059 lb.)	935 kg (2,059 lb.)
2.91 m (9 ft. 7 in.)	1001 kg (2,205 lb.)	1001 kg (2,205 lb.)
Boom-Lift Cylinders (2), Total Weight	354 kg (780 lb.)	354 kg (780 lb.)
Counterweight, Standard	4250 kg (9,370 lb.)	4250 kg (9,370 lb.)


Operating Dimensions 210G / 210G LC

Arm Length	2.42 m (7 ft. 11 in.)	2.91 m (9 ft. 7 in.)
Arm Digging Force		
SAE	133 kN (29,900 lbf)	110 kN (24,729 lbf)
ISO	140 kN (31,473 lbf)	114 kN (25,628 lbf)
Bucket Digging Force		
SAE	141 kN (31,698 lbf)	141 kN (31,698 lbf)
ISO	158 kN (35,520 lbf)	158 kN (35,520 lbf)
A Maximum Reach	9.43 m (30 ft. 11 in.)	9.92 m (32 ft. 7 in.)
A' Maximum Reach at Ground Level	9.25 m (30 ft. 4 in.)	9.75 m (32 ft. 0 in.)
B Maximum Digging Depth	6.18 m (20 ft. 3 in.)	6.67 m (21 ft. 11 in.)
B' Maximum Digging Depth at 2.44-m (8 ft. 0 in.) Flat Bottom	5.95 m (19 ft. 6 in.)	6.50 m (21 ft. 4 in.)
C Maximum Cutting Height	9.67 m (31 ft. 9 in.)	10.04 m (32 ft. 11 in.)
D Maximum Dumping Height	6.83 m (22 ft. 5 in.)	7.18 m (23 ft. 7 in.)
E Minimum Swing Radius	3.18 m (10 ft. 5 in.)	3.18 m (10 ft. 5 in.)
F Maximum Vertical Wall	5.30 m (17 ft. 5 in.)	5.99 m (19 ft. 8 in.)

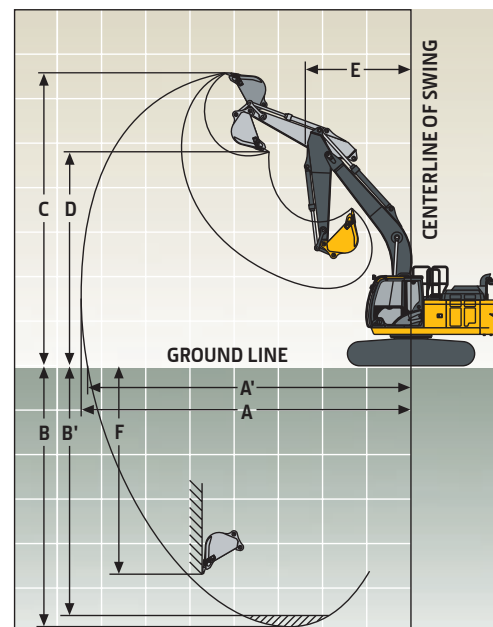

210G / 210G LC

Machine Dimensions		210G		210G LC	
Arm Length		2.42 m (7 ft. 11 in.)	2.91 m (9 ft. 7 in.)	2.42 m (7 ft. 11 in.)	2.91 m (9 ft. 7 in.)
A Overall Length		9.75 m (32 ft. 0 in.)	9.53 m (31 ft. 3 in.)	9.75 m (32 ft. 0 in.)	9.66 m (31 ft. 8 in.)
B Overall Height		3.18 m (10 ft. 5 in.)	3.01 m (9 ft. 11 in.)	3.18 m (10 ft. 5 in.)	3.01 m (9 ft. 11 in.)
C Rear-End Length/Swing Radius		2.89 m (9 ft. 6 in.)	2.89 m (9 ft. 6 in.)	2.89 m (9 ft. 6 in.)	2.89 m (9 ft. 6 in.)
D Distance Between Idler/Sprocket Centerline		3.35 m (11 ft. 0 in.)	3.35 m (11 ft. 0 in.)	3.66 m (12 ft. 0 in.)	3.66 m (12 ft. 0 in.)
E Undercarriage Length		4.17 m (13 ft. 8 in.)	4.17 m (13 ft. 8 in.)	4.47 m (14 ft. 8 in.)	4.47 m (14 ft. 8 in.)
F Counterweight Clearance		1030 mm (3 ft. 5 in.)	1030 mm (3 ft. 5 in.)	1030 mm (3 ft. 5 in.)	1030 mm (3 ft. 5 in.)
G Upperstructure Width		2.71 m (8 ft. 11 in.)	2.71 m (8 ft. 11 in.)	2.71 m (8 ft. 11 in.)	2.71 m (8 ft. 11 in.)
H Cab Height		2.95 m (9 ft. 8 in.)	2.95 m (9 ft. 8 in.)	2.95 m (9 ft. 8 in.)	2.95 m (9 ft. 8 in.)
I Track Width with Triple Semi-Grouser Shoes		600 mm (24 in.) / 700 mm (28 in.) / 800 mm (32 in.)	600 mm (24 in.) / 700 mm (28 in.) / 800 mm (32 in.)	600 mm (24 in.) / 700 mm (28 in.) / 800 mm (32 in.)	600 mm (24 in.) / 700 mm (28 in.) / 800 mm (32 in.)
J Gauge Width		2.22 m (7 ft. 3 in.)	2.22 m (7 ft. 3 in.)	2.39 m (7 ft. 10 in.)	2.39 m (7 ft. 10 in.)
K Ground Clearance		450 mm (17.72 in.)	450 mm (17.72 in.)	450 mm (17.72 in.)	450 mm (17.72 in.)
L Overall Width with Triple Semi-Grouser Shoes					
600 mm (24 in.)		2.82 m (9 ft. 3 in.)	2.82 m (9 ft. 3 in.)	2.99 m (9 ft. 10 in.)	2.99 m (9 ft. 10 in.)
700 mm (28 in.)		2.92 m (9 ft. 7 in.)	2.92 m (9 ft. 7 in.)	3.09 m (10 ft. 2 in.)	3.09 m (10 ft. 2 in.)
800 mm (32 in.)		3.02 m (9 ft. 11 in.)	3.02 m (9 ft. 11 in.)	3.19 m (10 ft. 6 in.)	3.19 m (10 ft. 6 in.)

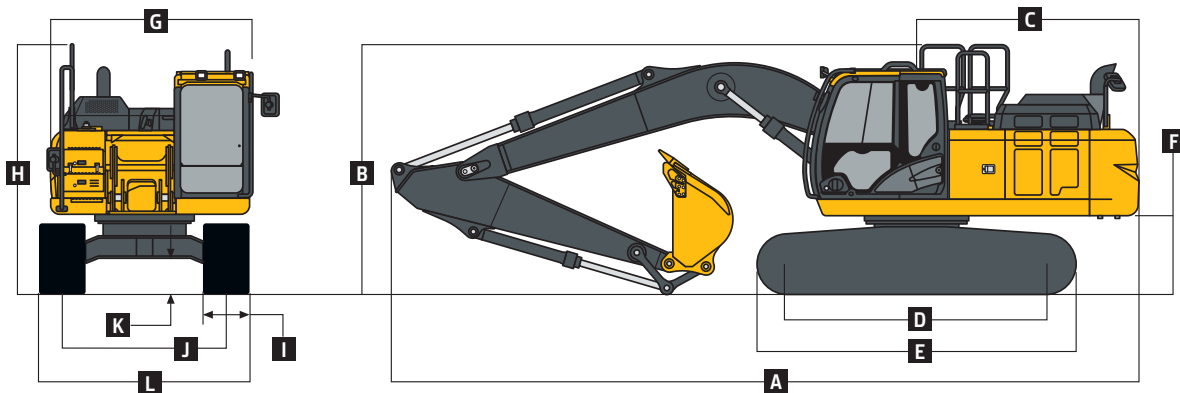

210G / 210G LC EXCAVATORS

210G Lift Capacities

Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). Ratings at bucket lift hook; machine equipped with 666-kg (1,468 lb.) bucket, standard counterweight, and standard gauge; and situated on firm, level, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine. All lift capacities are based on ISO 10567 (with power boost).

LOAD POINT HEIGHT	HORIZONTAL DISTANCE FROM CENTERLINE OF ROTATION									
	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)	
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
With 2.42-m (7 ft. 11 in.) arm and 800-mm (32 in.) triple semi-grouser shoes										
6.0 m (20 ft.)							5170 (11,380)	4570 (9,800)		
4.5 m (15 ft.)					6760 (14,560)	6760 (14,560)	5650 (12,290)	4420 (9,510)		
3.0 m (10 ft.)			(20,290)	(20,290)	8630 (18,560)	6520 (14,080)	6460 (13,990)	4200 (9,040)	4620 (9,920)	2910 (6,240)
1.5 m (5 ft.)					10 140 (21,880)	6100 (13,150)	6420 (13,810)	3990 (8,590)	4510 (9,710)	2810 (6,050)
Ground Line					9980 (21,410)	5910 (12,730)	6270 (13,480)	3850 (8,300)	4450 (9,570)	2750 (5,920)
-1.5 m (-5 ft.)			9330 (21,390)	9330 (21,390)	9950 (21,360)	5890 (12,680)	6230 (13,400)	3820 (8,220)		
-3.0 m (-10 ft.)			12 640 (27,400)	11 810	9150 (19,750)	6000 (12,910)	6320 (13,620)	3900 (8,420)		
-4.5 m (-15 ft.)					6300 (13,030)	6280 (13,030)				

210G Lift Capacities (continued)

Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). Ratings at bucket lift hook; machine equipped with 666-kg (1,468 lb.) bucket, standard counterweight, and standard gauge; and situated on firm, level, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine. All lift capacities are based on ISO 10567 (with power boost).

HORIZONTAL DISTANCE FROM CENTERLINE OF ROTATION										
	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)	
LOAD POINT HEIGHT	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
With 2.91-m (9 ft. 7 in.) arm and 600-mm (24 in.) triple semi-grouser shoes										
6.0 m (20 ft.)							4650 (10,210)	4530 (9,720)		
4.5 m (15 ft.)					6030 (13,010)	6030 (13,010)	5200 (11,310)	4370 (9,400)	4610 (9,890)	2940 (6,300)
3.0 m (10 ft.)					7950 (17,100)	6510 (14,040)	6070 (13,150)	4140 (8,910)	4500 (9,670)	2840 (6,100)
1.5 m (5 ft.)					9680 (20,880)	6030 (12,990)	6270 (13,480)	3910 (8,410)	4380 (9,420)	2730 (5,860)
Ground Line			4270 (9,930)	4270 (9,930)	9720 (20,860)	5770 (12,420)	6090 (13,090)	3740 (8,060)	4290 (9,220)	2640 (5,680)
-1.5 m (-5 ft.)	4900 (11,010)	4900 (11,010)	8520 (19,440)	8520 (19,440)	9630 (20,670)	5700 (12,250)	6010 (12,920)	3670 (7,910)	4260 (9,170)	2620 (5,640)
-3.0 m (-10 ft.)	9390 (21,140)	9390 (21,140)	13 810 (29,920)	11 360 (24,350)	9650 (20,830)	5760 (12,390)	6050 (13,020)	3710 (7,990)		
-4.5 m (-15 ft.)			10 680 (22,820)	10 680 (22,820)	7540 (16,000)	5960 (12,860)				
With 2.91-m (9 ft. 7 in.) arm and 700-mm (28 in.) triple semi-grouser shoes										
6.0 m (20 ft.)							4650 (10,210)	4600 (9,890)		
4.5 m (15 ft.)					6030 (13,010)	6030 (13,010)	5200 (11,310)	4450 (9,560)	4710 (10,090)	3000 (6,420)
3.0 m (10 ft.)					7950 (17,100)	6620 (14,280)	6070 (13,150)	4210 (9,070)	4600 (9,870)	2900 (6,220)
1.5 m (5 ft.)					9680 (20,880)	6140 (13,230)	6390 (13,750)	3980 (8,570)	4470 (9,620)	2790 (5,980)
Ground Line			4270 (9,930)	4270 (9,930)	9910 (21,270)	5880 (12,650)	6210 (13,360)	3820 (8,220)	4380 (9,420)	2700 (5,810)
-1.5 m (-5 ft.)	4900 (11,010)	4900 (11,010)	8520 (19,440)	8520 (19,440)	9830 (21,080)	5810 (12,490)	6130 (13,190)	3750 (8,070)	4350 (9,380)	2680 (5,760)
-3.0 m (-10 ft.)	9390 (21,140)	9390 (21,140)	13 810 (29,920)	11 560 (24,780)	9650 (20,840)	5870 (12,620)	6170 (13,290)	3780 (8,150)		
-4.5 m (-15 ft.)			10 680 (22,820)	10 680 (22,820)	7540 (16,000)	6070 (13,100)				
With 2.91-m (9 ft. 7 in.) arm and 800-mm (32 in.) triple semi-grouser shoes										
6.0 m (20 ft.)							4650 (10,210)	4640 (9,960)		
4.5 m (15 ft.)					6030 (13,010)	6030 (13,010)	5200 (11,310)	4480 (9,640)	4750 (10,190)	3020 (6,480)
3.0 m (10 ft.)					7950 (17,100)	6670 (14,380)	6070 (13,150)	4250 (9,140)	4640 (9,970)	2920 (6,280)
1.5 m (5 ft.)					9680 (20,880)	6180 (13,330)	6450 (13,880)	4010 (8,640)	4520 (9,710)	2810 (6,040)
Ground Line			4270 (9,930)	4270 (9,930)	10 000 (21,460)	5920 (12,760)	6270 (13,480)	3850 (8,290)	4420 (9,520)	2730 (5,860)
-1.5 m (-5 ft.)	4900 (11,010)	4900 (11,010)	8520 (19,440)	8520 (19,440)	9910 (21,270)	5850 (12,590)	6190 (13,320)	3780 (8,140)	4400 (9,470)	2700 (5,820)
-3.0 m (-10 ft.)	9390 (21,140)	9390 (21,140)	13 810 (29,920)	11 650 (24,970)	9650 (20,840)	5910 (12,730)	6230 (13,410)	3820 (8,220)		
-4.5 m (-15 ft.)			10 680 (22,820)	10 680 (22,820)	7540 (16,000)	6120 (13,200)				

210G / 210G LC

210G LC Lift Capacities

Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). Ratings at bucket lift hook; machine equipped with 666-kg (1,468 lb.) bucket, standard counterweight, and standard gauge; and situated on firm, level, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine. All lift capacities are based on ISO 10567 (with power boost).

		HORIZONTAL DISTANCE FROM CENTERLINE OF ROTATION								
	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)	
LOAD POINT HEIGHT	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
With 2.42-m (7 ft. 11 in.) arm and 800-mm (32 in.) triple semi-grouser shoes										
6.0 m (20 ft.)							5170 (11,380)	5100 (10,950)		
4.5 m (15 ft.)			(20,290)	(20,290)	6760 (14,560)	6760 (14,560)	5650 (12,290)	4950 (10,660)		
3.0 m (10 ft.)					8630 (18,560)	7370 (15,890)	6460 (13,990)	4730 (10,180)	5270 (11,330)	3290 (7,060)
1.5 m (5 ft.)					10 140 (21,880)	6930 (14,930)	7230 (15,650)	4510 (9,720)	5170 (11,110)	3190 (6,870)
Ground Line					10 660 (23,090)	6740 (14,500)	7220 (15,520)	4380 (9,420)	5100 (10,970)	3130 (6,740)
−1.5 m (−5 ft.)			9330 (21,390)	9330 (21,390)	10 330 (22,390)	6720 (14,450)	7180 (15,430)	4340 (9,350)		
−3.0 m (−10 ft.)			12 640 (27,400)	12 640 (27,400)	9150 (19,750)	6820 (14,690)	6580 (14,030)	4420 (9,550)		
−4.5 m (−15 ft.)					6300 (13,030)	6300				
With 2.91-m (9 ft. 7 in.) arm and 600-mm (24 in.) triple semi-grouser shoes										
6.0 m (20 ft.)							4650 (10,210)	4650 (10,210)		
4.5 m (15 ft.)					6030 (13,010)	6030 (13,010)	5200 (11,310)	4870 (10,480)	4820 (10,560)	3300 (7,070)
3.0 m (10 ft.)					7950 (17,100)	7310 (15,750)	6070 (13,150)	4630 (9,980)	5120 (11,000)	3200 (6,870)
1.5 m (5 ft.)					9680 (20,880)	6810 (14,670)	6940 (15,030)	4400 (9,470)	4990 (10,730)	3080 (6,630)
Ground Line			4270 (9,930)	4270 (9,930)	10 540 (22,810)	6540 (14,080)	6980 (15,000)	4230 (9,110)	4900 (10,540)	3000 (6,450)
−1.5 m (−5 ft.)	4900 (11,010)	4900 (11,010)	8520 (19,440)	8520 (19,440)	10 510 (22,760)	6470 (13,910)	6900 (14,830)	4160 (8,950)	4870 (10,490)	2970 (6,400)
−3.0 m (−10 ft.)	9390 (21,140)	9390 (21,140)	13 810 (29,920)	13 120 (28,090)	9650 (20,840)	6530 (14,050)	6940 (14,930)	4190 (9,040)		
−4.5 m (−15 ft.)			10 680 (22,820)	10 680 (22,820)	7540 (16,000)	6740 (14,540)				
With 2.91-m (9 ft. 7 in.) arm and 700-mm (28 in.) triple semi-grouser shoes										
6.0 m (20 ft.)							4650 (10,210)	4650 (10,210)		
4.5 m (15 ft.)					6030 (13,010)	6030 (13,010)	5200 (11,310)	4950 (10,650)	4820 (10,560)	3360 (7,210)
3.0 m (10 ft.)					7950 (17,100)	7430 (16,010)	6070 (13,150)	4720 (10,150)	5180 (11,210)	3260 (7,000)
1.5 m (5 ft.)					9680 (20,880)	6930 (14,930)	6940 (15,030)	4480 (9,640)	5090 (10,950)	3150 (6,760)
Ground Line			4270 (9,930)	4270 (9,930)	10 540 (22,810)	6660 (14,340)	7120 (15,300)	4310 (9,280)	5000 (10,750)	3060 (6,580)
−1.5 m (−5 ft.)	4900 (11,010)	4900 (11,010)	8520 (19,440)	8520 (19,440)	10 510 (22,760)	6590 (14,170)	7040 (15,130)	4240 (9,130)	4970 (10,700)	3030 (6,530)
−3.0 m (−10 ft.)	9390 (21,140)	9390 (21,140)	13 810 (29,920)	13 340 (28,570)	9650 (20,840)	6650 (14,310)	7010 (15,070)	4280 (9,220)		
−4.5 m (−15 ft.)			10 680 (22,820)	10 680 (22,820)	7540 (16,000)	6860 (14,800)				

210G LC Lift Capacities (continued)

Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). Ratings at bucket lift hook; machine equipped with 666-kg (1,468 lb.) bucket, standard counterweight, and standard gauge; and situated on firm, level, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine. All lift capacities are based on ISO 10567 (with power boost).


do not exceed 67 percent of hydraulic capacities or 75 percent of weight needed to tip machine. Air lift capacities are based on ISO 10581 (with power boost).

LOAD POINT HEIGHT	HORIZONTAL DISTANCE FROM CENTERLINE OF ROTATION									
	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)	
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
With 2.91-m (9 ft. 7 in.) arm and 800-mm (32 in.) triple semi-grouser shoes										
6.0 m (20 ft.)							4650 (10,210)	4650 (10,210)		
4.5 m (15 ft.)					6030 (13,010)	6030 (13,010)	5200 (11,310)	5010 (10,790)	4820 (10,560)	3410 (7,310)
3.0 m (10 ft.)					7950 (17,100)	7520 (16,200)	6070 (13,150)	4780 (10,290)	5180 (11,290)	3310 (7,100)
1.5 m (5 ft.)					9680 (20,880)	7020 (15,120)	6940 (15,030)	4540 (9,780)	5170 (11,110)	3190 (6,860)
Ground Line			4270 (9,930)	4270 (9,930)	10 540 (22,810)	6750 (14,530)	7220 (15,520)	4370 (9,410)	5080 (10,920)	3110 (6,680)
-1.5 m (-5 ft.)	4900 (11,010)	4900 (11,010)	8520 (19,440)	8520 (19,440)	15 100 (22,760)	6680 (14,360)	7140 (15,350)	4300 (9,260)	5050 (10,870)	3080 (6,630)
-3.0 m (-10 ft.)	9390 (21,140)	9390 (21,140)	13 810 (29,920)	13 510 (28,930)	9650 (20,840)	6740 (14,500)	7010 (15,070)	4340 (9,350)		
-4.5 m (-15 ft.)			10 680 (22,820)	10 680 (22,820)	7540 (16,000)	6950 (14,990)				

Buckets**210G / 210G LC**

A full line of buckets is offered to meet a wide variety of applications. Digging forces are with power boost. Buckets are equipped with John Deere TK-Series Bucket Teeth standard. Replaceable cutting edges and a variety of teeth are available through John Deere Parts. Optional side cutters add 150 mm (6 in.) to bucket widths. Capacities are SAE heaped ratings.

Type Bucket	Bucket Width		Bucket Capacity		Bucket Weight		Bucket Dig Force		Arm Dig Force 2.42 m (7 ft. 11 in.)		Arm Dig Force 2.91 m (9 ft. 7 in.)		Bucket Tip Radius		Number of Teeth
	mm	in.	m ³	cu. yd.	kg	lb.	kN	lbf	kN	lbf	kN	lbf	mm	in.	
Heavy Duty	914	36	0.69	0.90	704	1,551	164.4	36,948	141.1	31,712	115.1	25,869	1422	56	5
	1067	42	0.83	1.09	768	1,692	164.4	36,948	141.1	31,712	115.1	25,869	1422	56	5
	1219	48	0.99	1.29	850	1,873	164.4	36,948	141.1	31,712	115.1	25,869	1422	56	6
Heavy Duty High Capacity	610	24	0.43	0.56	660	1,453	161.5	36,300	140.1	31,504	114.4	25,719	1448	57	4
	760	30	0.58	0.76	723	1,593	161.5	36,300	140.1	31,504	114.4	25,719	1448	57	4
	914	36	0.74	0.97	829	1,825	161.5	36,300	140.1	31,504	114.4	25,719	1448	57	5
	1067	42	0.91	1.19	924	2,035	161.5	36,300	140.1	31,504	114.4	25,719	1448	57	5

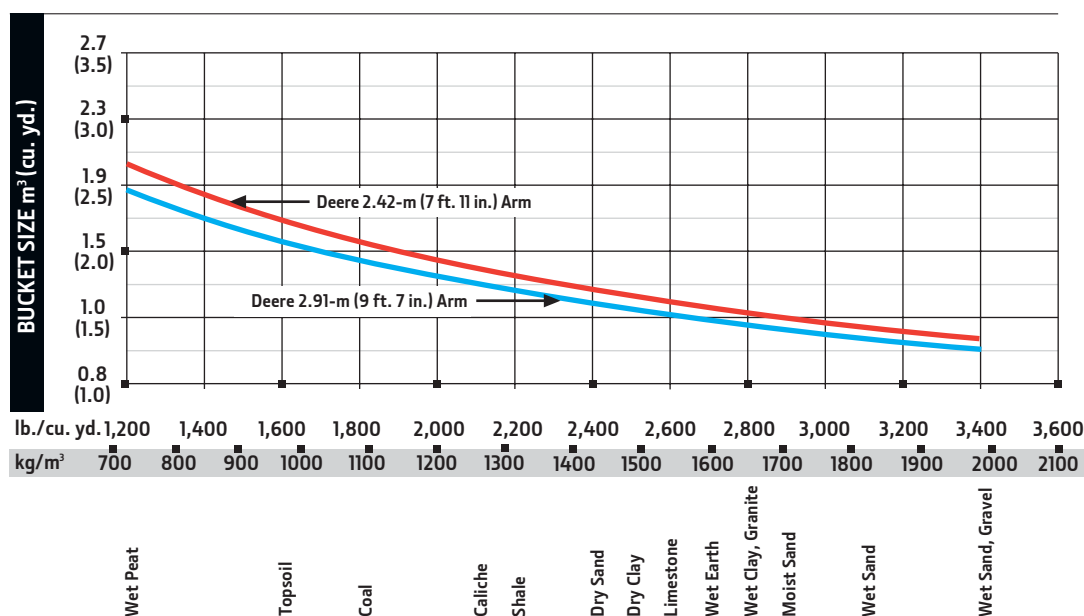Bucket Selection Guide*

* Contact your John Deere dealer for optimum bucket and attachment selections. These recommendations are for general conditions and average use. Does not include optional equipment such as thumbs or couplers. Larger buckets may be possible when using light materials, for flat and level operations, less compacted materials, and volume loading applications such as mass-excavation applications in ideal conditions. Smaller buckets are recommended for adverse conditions such as off-level applications, rocks, and uneven surfaces. Bucket capacity indicated is SAE heaped.

Additional equipment

Key: ● Standard ▲ Optional or special

See your John Deere dealer for further information.

210G / 210G LC	Engine
●	Auto-idle system
●	Automatic belt-tension device
●	Batteries (2 – 12 volt)
●	Coolant recovery tank
●	Dual-element dry-type air filter
●	Electronic engine control
●	Enclosed fan guard (conforms to SAE J1308)
●	Engine coolant to –37 deg. C (–34 deg. F)
●	Fuel filter with water separator
●	Fuel shutoff valve
●	Full-flow oil filter
●	Turbocharger with charge air cooler
●	Cool-on-demand hydraulic-driven fan
●	500-hour engine-oil-change interval
●	70% (35 deg.) off-level capability
●	Engine-oil-sampling valve
●	Programmable auto shutdown
▲	Chrome exhaust stack
▲	Severe-duty fuel filter
▲	Hydraulic fan reverser
▲	Engine coolant heater
▲	Engine air precleaner
	Hydraulic System
●	Reduced-drift valve for boom down, arm in
●	Auxiliary hydraulic valve section
●	Spring-applied, hydraulically released automatic swing brake
●	Auxiliary hydraulic-flow adjustments through monitor
●	Auto power lift
●	5,000-hour hydraulic-oil-change interval
●	Hydraulic-oil-sampling valve
●	Control pattern-change valve
●	Powerwise Plus™ hydraulic-management system
▲	Auxiliary hydraulics with combination piping
▲	Auxiliary pilot and electric controls
▲	Hydraulic filter restriction indicator kit
▲	Load-lowering control device
▲	Single-pedal propel control
	Undercarriage
●	Planetary drive with axial piston motors
●	Propel motor shields
●	Spring-applied, hydraulically released automatic propel brake
●	Track guides, front idler and center
●	2-speed propel with automatic shift
●	Upper carrier rollers (2)
●	Sealed and lubricated track chain
●	Heavy-duty undercover

210G / 210G LC	Undercarriage (continued)
▲	Triple semi-grouser shoes, 600 mm (24 in.)
▲	Triple semi-grouser shoes, 700 mm (28 in.)
▲	Triple semi-grouser shoes, 800 mm (32 in.)
	Upperstructure
●	Right-hand, left-hand, and counterweight mirrors
●	Vandal locks with ignition key: Cab door / Service doors / Toolbox
●	Debris screen in side panel
●	Remote-mounted engine oil and fuel filters
●	Service handrails
	Front Attachments
●	Centralized lubrication system
●	Dirt seals on all bucket pins
●	Less boom and arm
●	Oil-impregnated bushings
●	Reinforced resin thrust plates
●	Tungsten carbide thermal coating on arm-to-bucket joint
▲	Arm, 2.42 m (7 ft. 11 in.)
▲	Arm, 2.91 m (9 ft. 7 in.)
▲	Attachment quick-couplers
▲	Boom cylinder with plumbing to mainframe for less boom and arm
▲	Buckets: Ditching / Heavy duty / Heavy-duty high capacity / Side cutters and teeth
▲	Material clamps
▲	Super-long fronts
	Operator's Station
●	Meets ISO 12117-2 for ROPS
●	Adjustable independent-control positions (levers-to-seat, seat-to-pedals)
●	AM/FM radio
●	Auto climate control/air conditioner/heater/pressurizer
●	Built-in Operator's Manual storage compartment and manual
●	Cell-phone power outlet, 12 volt, 60 watt, 5 amp
●	Coat hook
●	Deluxe suspension cloth seat with 100-mm (4 in.) adjustable armrests
●	Floor mat
●	Front windshield wiper with intermittent speeds
●	Gauges (illuminated): Diesel Exhaust Fluid (DEF) / Engine coolant / Fuel
●	Horn, electric
●	Hour meter, electric
●	Hydraulic shutoff lever, all controls
●	Hydraulic warm-up control
●	Interior light

210G / 210G LC	Operator's Station (continued)
●	Large cup holder
●	Machine Information Center (MIC)
●	Mode selectors (illuminated): Power modes (3) / Travel modes (2 with automatic shift) / Work mode (1)
●	Multifunction, color LCD monitor with: Diagnostic capability / Multiple-language capabilities / Maintenance tracking / Clock / System monitoring with alarm features: Auto-idle indicator, engine air cleaner restriction indicator light, engine check, engine coolant temperature indicator light with audible alarm, engine oil pressure indicator light with audible alarm, low-alternator-charge indicator light, low-fuel indicator light, low DEF indication with audible alarm, fault code alert indicator, fuel-rate display, wiper-mode indicator, work-lights-on indicator, and work-mode indicator
●	Motion alarm with cancel switch (conforms to SAE J994)
●	Power-boost switch on right console lever
●	Auxiliary hydraulic control switches in right console lever
●	SAE 2-lever control pattern
●	Seat belt, 76 mm (3 in.), non-retractable
●	Tinted glass
●	Transparent tinted overhead hatch
●	Hot/cold beverage compartment
●	USB charging port
▲	Air-suspension heated seat
▲	Hydraulic oil filter restriction indicator light
▲	Premium thermally heated and actively cooled leather seat
▲	Protection screens for cab front, rear, and side
▲	Window vandal-protection covers
	Electrical
●	100-amp alternator
●	Blade-type multi-fused circuits
●	Positive-terminal battery covers
●	JDLINK™ wireless communication system (available in specific countries; see your dealer for details)
●	Rearview camera
▲	Cab extension wiring harness
	Lights
●	Work lights: Halogen / 1 mounted on boom / 1 mounted on frame
▲	2 lights mounted on cab / 1 mounted on right side of boom / 1 mounted under engine hood
▲	LED light kit

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan, at test conditions specified per ISO 9249. No derating is required up to 3050-m (10,000 ft.) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on units with 1065-mm (42 in.), 0.91-m³ (1.19 cu. yd.), 886-kg (1,951 lb.) general-purpose buckets; 2.91-m (9 ft. 7 in.) arms; 4250-kg (9,370 lb.) counterweights; 800-mm (32 in.) triple semi-grouser shoes; full fuel tanks; and 79-kg (175 lb.) operators.

